

**Machine Rating**

Rated operating capacity (ISO 14397-1)	460 kg
Tipping load (ISO 14397-2):	1314 kg
Pump capacity	45.40 L/min
System relief at quick couplers	200.00 bar
Travel speed, reverse	4.7 km/h
Travel speed, forward	6.6 km/h

**Engine**

Make / Model	KUBOTA / D902-E4B-BC-1
Fuel	Diesel
Cooling	Liquid
Power at 3600 RPM (ISO 9249)	17.5 kW
Torque at 2600 RPM (SAE J9249)	54.2 Nm
Number of cylinders	3
Displacement	0.90 L
Fuel tank	26.50 L

**Weights**

Operating weight	1538 kg
Shipping weight	1381 kg

**Controls**

Vehicle steering	Direction and speed controlled by one hand lever
Loader hydraulics tilt and lift	Hand lever

**Drive System**

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

**Standard Features**

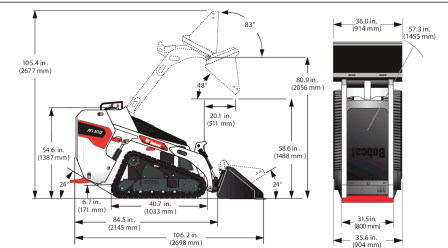
Auxiliary hydraulics	Parking brake
Bob-Tach™	Reverse travel stop panel
Built-in tie down and crane/lift locations	Spark arrestor muffler
Hydraulic drive train	Tilt lockout
Instrumentation	Tracks — rubber — 180 mm
Lift arm lockout with manual bypass	CE certification
Lift arm support	Warranty: 24 months or 2000 hours, whichever occurs first
Neutral start interlocks	

**Options**

Attachment control kit	Light kit
Catalytic exhaust purifier	Ride-on platform
Engine block heater	Shutdown kit

**Environmental**

Noise level LpA(EU Directive 2000/14/EC)	88 dB(A)
Noise level LWA(EU Directive 2000/14/EC)	103 dB(A)
Hand-arm vibration (ISO 5349-1)	6.15 ms <sup>-2</sup>

**Dimensions**


(A)	23.8°	(I)	1992.6 mm
(B)	168.0 mm	(J)	2698.4 mm
(C)	22.7°	(K)	2676.7 mm
(D)	48.7°	(M)	83.3°
(E)	1265.0 mm	(N)	1052.0 mm
(F)	475.2 mm	(O)	1455.0 mm
(G)	205.0 mm	(P)	903.8 mm
(H)	2056.8 mm	(Q)	723.8 mm
		(R)	914.4 mm